



Asymmetric mirror cabinet, wood & stone




The SW-MC mirror cabinet with one bay left open: solid-oak shelves behind an oak divider sit beside the mirror doors, so everyday things stay in reach and the cabinet looks lighter on the wall. Same height, depth, Corian shelf and lights as the SW-MC, so the two can be mixed in one project.

RANGE (6 CODES)

800 (1 door) · 1000 (2) · 1200 (2) — H 730, D 160; open bay 250 mm on the left (-L) or right (-R). Codes SW-MA-080-L ... SW-MA-120-R.

SPECIFICATION

- Cheeks and divider: solid oak 20 mm, natural oil (walnut option); 2 solid-oak shelves in the open bay, oak-veneer back
- Doors: 16 mm MR board (lacquered inside) + 4 mm mirror on the front; concealed soft-close hinges; run 20 mm below the carcass as the finger pull
- Door bay: 5 mm plywood back in grooves 17 mm from the wall with a 4 mm mirror; 2 × 6 mm glass shelves; socket module
- Open shelf: 12 mm Corian on a 16 mm MR core with a seamless front edge, full width
- Light: LED basin down-light under the shelf and niche light behind the door overhang
- Fixing: French cleat in the 17 mm recess; underside typically 1100 mm above floor

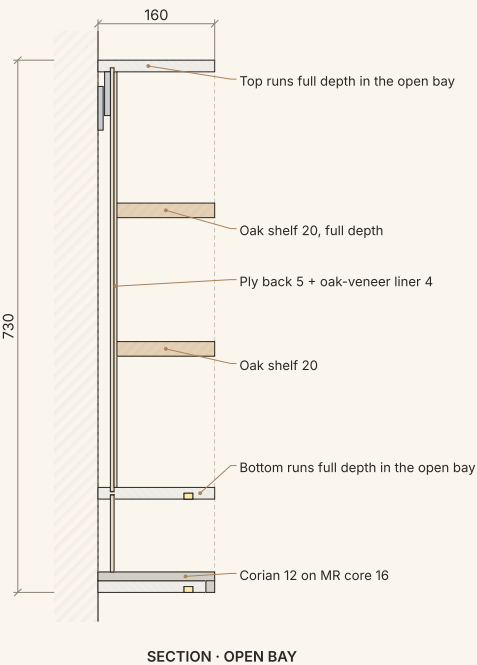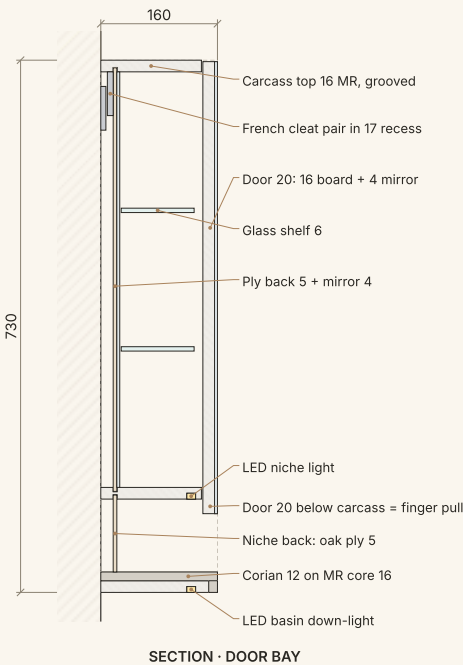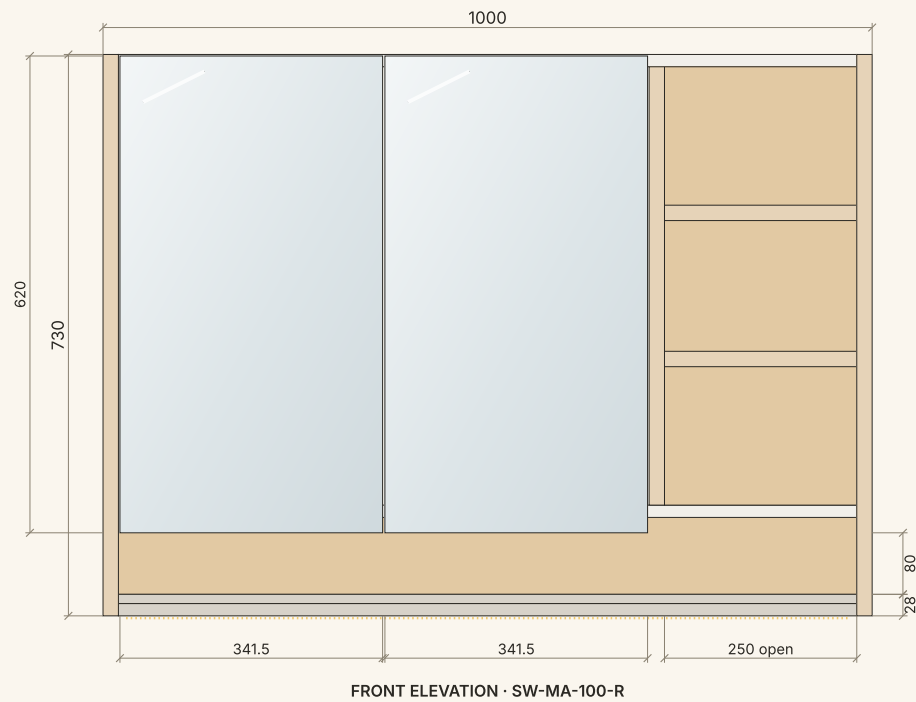


SIZES (DRAWINGS SHOW SW-MA-100-R; -L IS THE MIRROR IMAGE)

CODE	W × H × D	DOORS	DOOR WIDTH	CABINET INTERIOR W × D × H	OPEN BAY W × D	KG
SW-MA-080-L / -R	800 × 730 × 160	1	486	490 × 112 × 570	250 × 134, 2 oak shelves	≈ 26
SW-MA-100-L / -R	1000 × 730 × 160	2	341.5	690 × 112 × 570	250 × 134, 2 oak shelves	≈ 33
SW-MA-120-L / -R	1200 × 730 × 160	2	441.5	890 × 112 × 570	250 × 134, 2 oak shelves	≈ 40

Weights are estimates from part volumes (oak 700, MR 750, ply 600, Corian 1700, glass and mirror 2500 kg/m³), without hinges and driver.

RANGE AT ONE SCALE (SW-MA-080-L, 100-R, 120-R)

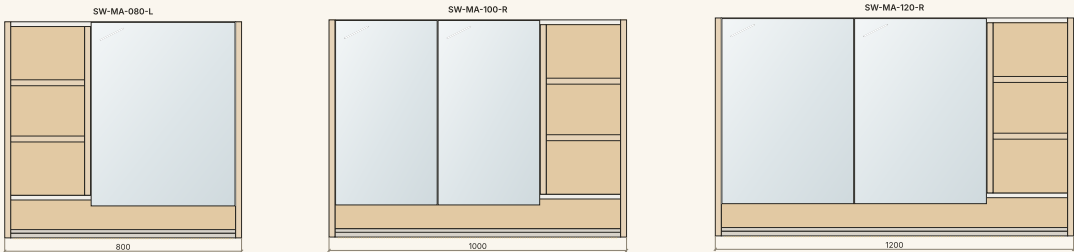

CUTTING LIST — FINISHED SIZES PER WIDTH

PART	MATERIAL	SW-MA-080	SW-MA-100	SW-MA-120
Cheek ×2	Solid oak 20 mm, natural oil (walnut option)	730 × 160 × 20	730 × 160 × 20	730 × 160 × 20
Divider	Solid oak 20 mm, natural oil (walnut option)	570 × 138 × 20	570 × 138 × 20	570 × 138 × 20
Oak shelf ×2	Solid oak 20 mm, natural oil (walnut option)	250 × 134 × 20	250 × 134 × 20	250 × 134 × 20
Shelf core	MR board 16 mm, matt lacquer	760 × 148 × 16	960 × 148 × 16	1160 × 148 × 16
Corian top	Corian solid surface 12 mm, seamless bonded edge	760 × 160 × 12	960 × 160 × 12	1160 × 160 × 12
Corian front edge	Corian solid surface 12 mm, seamless bonded edge	760 × 16 × 12	960 × 16 × 12	1160 × 16 × 12
Niche back	Oak-veneered plywood, in grooves / glued	775 × 105.5 × 5	975 × 105.5 × 5	1175 × 105.5 × 5
Carcass bottom	MR board 16 mm, matt lacquer	760 × 138 × 16, 270 wide part to 160 deep	960 × 138 × 16, 270 wide part to 160 deep	1160 × 138 × 16, 270 wide part to 160 deep
Carcass top	MR board 16 mm, matt lacquer	760 × 138 × 16, 270 wide part to 160 deep	960 × 138 × 16, 270 wide part to 160 deep	1160 × 138 × 16, 270 wide part to 160 deep
Back panel	Plywood 5 mm, lacquered, in grooves	775 × 581 × 5	975 × 581 × 5	1175 × 581 × 5
Back mirror (door bay)	4 mm silver mirror (doors: on 16 mm MR board)	570 × 490 × 4	690 × 570 × 4	890 × 570 × 4
Open-bay liner	Oak-veneered plywood, in grooves / glued	570 × 250 × 4	570 × 250 × 4	570 × 250 × 4
Glass shelf ×2	6 mm tempered glass shelf	486 × 100 × 6	686 × 100 × 6	886 × 100 × 6
Door panel	MR board 16, lacquered inside	620 × 486 × 16 (×1)	620 × 341.5 × 16 (×2)	620 × 441.5 × 16 (×2)
Door mirror (front)	4 mm silver mirror	620 × 486 × 4 (×1)	620 × 341.5 × 4 (×2)	620 × 441.5 × 4 (×2)
LED profile ×2	LED strip in aluminium profile with diffuser	740 × 12 × 8	940 × 12 × 8	1140 × 12 × 8
French cleat, cabinet	French cleat pair (bought-in)	760 × 60 × 8	960 × 60 × 8	1160 × 60 × 8

Finished sizes in mm (L × W × T), same parts for -L and -R (mirror-image machining of cheeks, top and bottom). Top and bottom: one board, 138 deep behind the doors and full depth under the divider and the open bay (CNC-cut).


PRODUCTION NOTES

- As SW-MC Rev C: back in 5.5 mm grooves 17 mm from the rear edge, door drop 20, Corian edge bonded seamless, LED grooves 12 × 8.
- Divider: solid oak 20, from the carcass bottom to the top, dowelled; its front is flush with the cheeks and doors (2 mm door gap).
- Open-bay shelves: solid oak 20, on 5 mm pins or housed 5 mm into divider and cheek; edges eased.
- Carcass top and bottom: one board each, 138 deep behind the doors and full depth (160) under the divider and the open bay.


ELECTRICAL & SAFETY (VERIFY LOCALLY)

- Bathroom zone 2 needs IPX4 minimum for LED and socket; follow local wiring regulations.
- LED driver and socket on the dedicated circuit, installed by a licensed electrician.


CONSTRUCTION DETAILS · SW-MA-100-R (SAME FOR ALL SIZES)

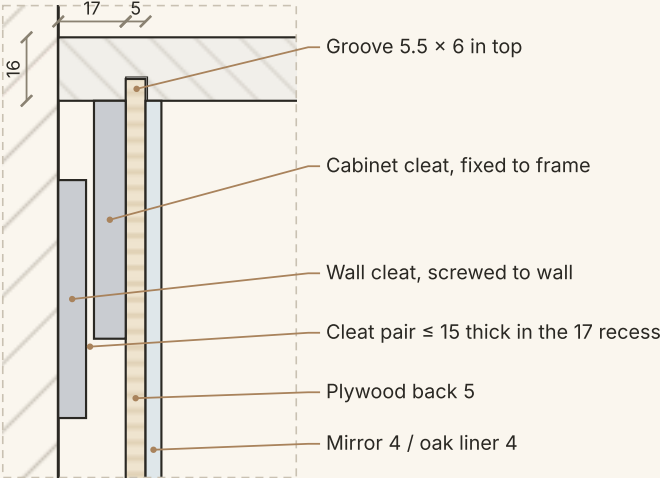


DETAIL B · BACK HOUSING & FRENCH CLEAT

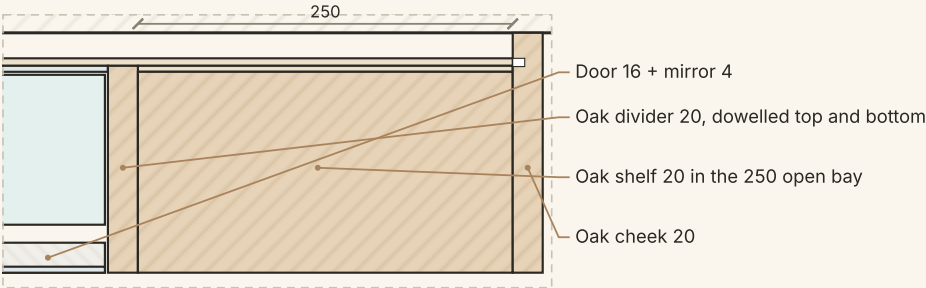

DETAIL E · PLAN: DOOR, DIVIDER & OPEN BAY

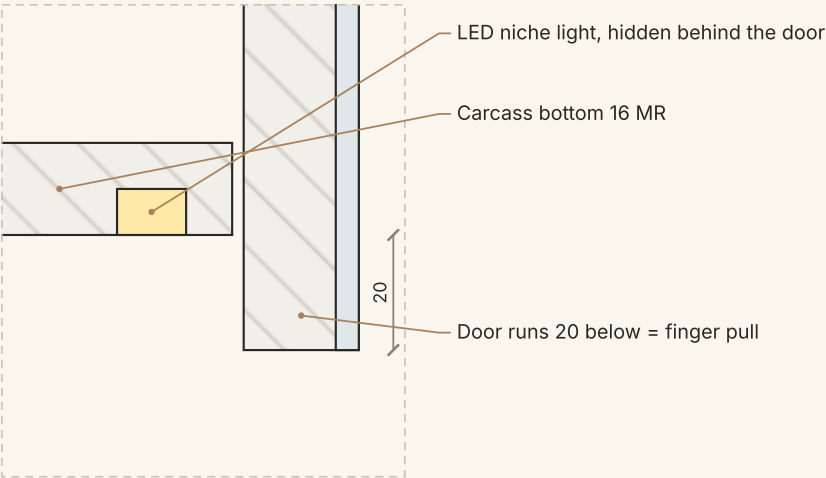

DETAIL C · FINGER PULL & NICHE LIGHT

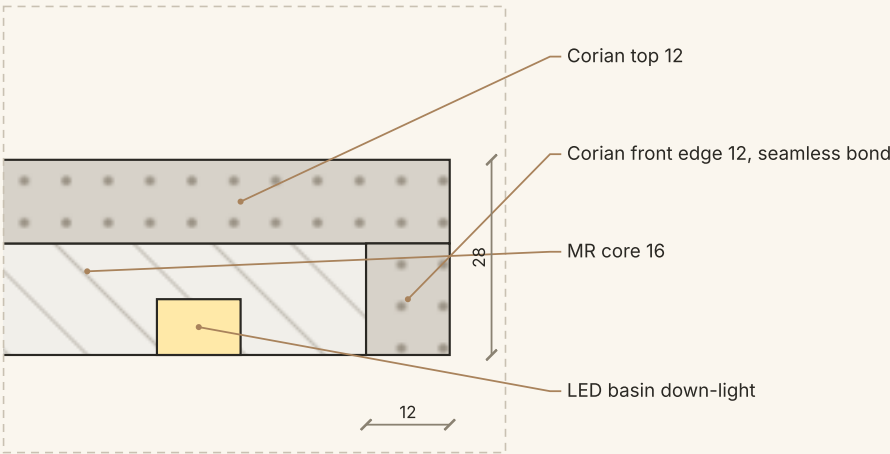

DETAIL D · CORIAN SHELF EDGE & BASIN LIGHT